

Somfy automation (optional)



**Master Pro Bitech**  
photocell set  
(transmitter + receiver)  
1841233



**Somfy Keygo 4 RTS**  
4 channel remote  
1841118



**Wireless code keyboard**  
2 - RTS channels  
1841030



**RTS receiver with DRY contact photocell set**  
Zestaw fotokomórek  
(transmitter + receiver)  
1841102



**TaHoma® control panel**  
1811478



**Somfy battery**  
gate emergency power supply  
from 5 to 10 work cycles  
9001001



**Metal io code keyboard**  
1841207



**Drive control receiver**  
1841229

somfy.

Sommer automation (optional)



**Angle-adjustable photocell**  
(transmitter + receiver)  
7029V000



**4 - channel PEARL remote**  
4018V000



**Radio fingerprint scanner**  
„ENTRASys+“  
S11186-00001



**Radio keyboard**  
"ENTRAcode+“  
S11188-00001

SOMMER



**Internet gateway**  
PL-ISG02W



**Magnetic sensor**  
PL-ISG-TWS-101



**Control button Wallstation**  
S10834-00001



**LED lightstrip Lumi+**  
additional light  
7041V000

PAGEN  
WWW.WINDOWSPAGEN.COM

WINDOWS • DOORS • SHUTTERS • GATES

PAGEN Sp. z o.o.  
32-864 Gnojnik 699  
+48 14 63 93 130  
export@pagen.pl

PAGEN



GARAGE DOORS




# Gate GENIUS



## Quality assurance

Gate is a very important element of the building. It should be solid, safe and matched with the building architecture. To fulfill all the expectations of the clients and deliver the product of the high quality, we treat every order individually.

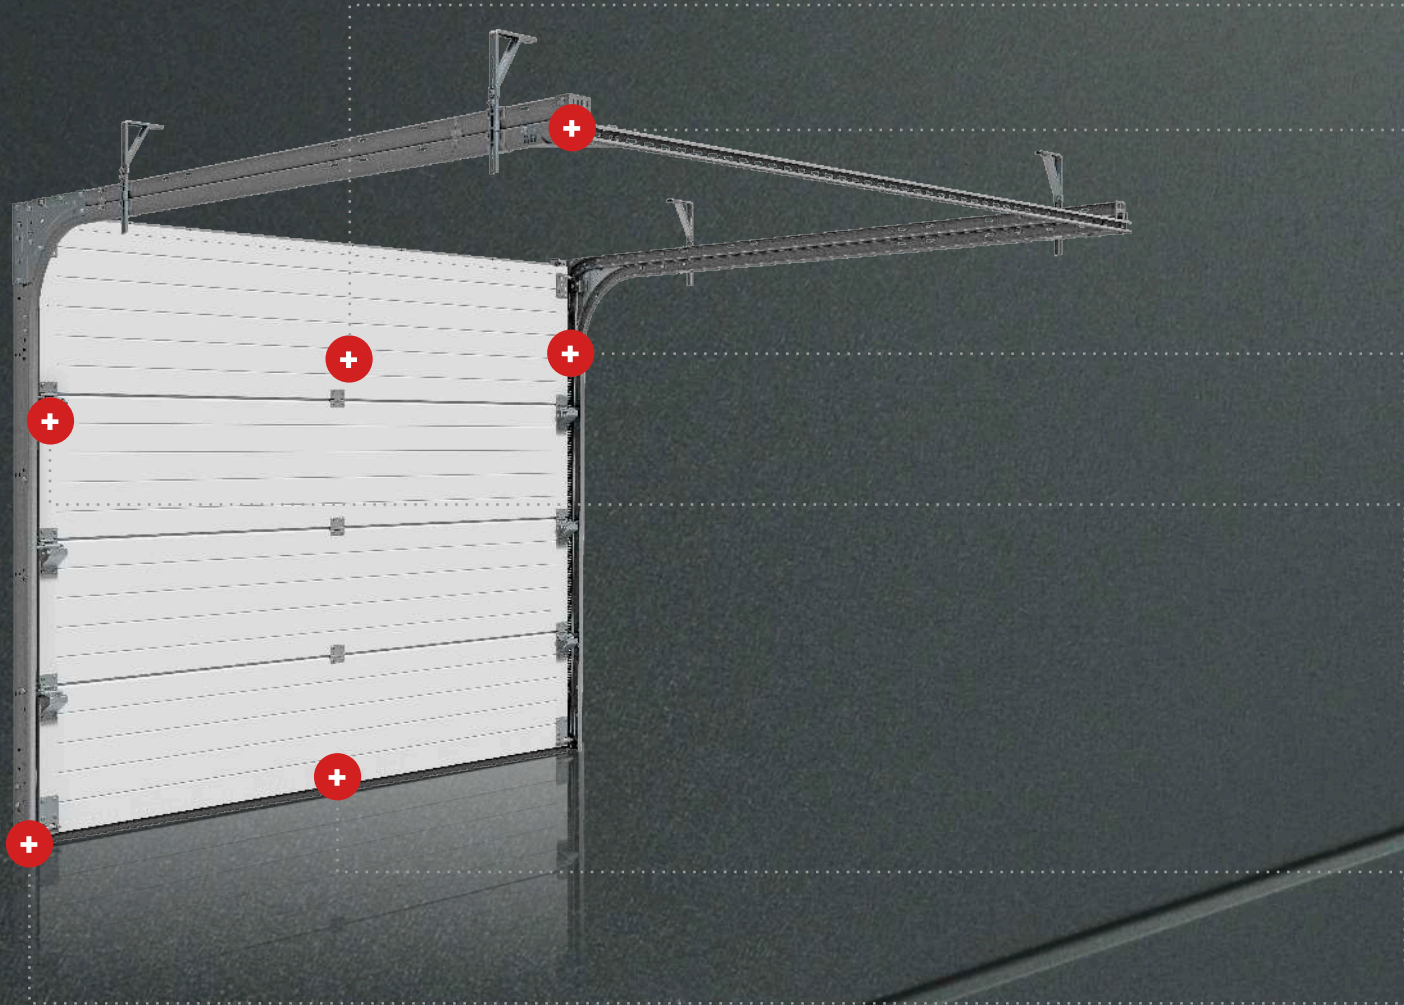

**40 mm panel**  
Sectional PAGEN gates are made from high quality, 40 mm thick panels, filled with poliurethane foam.



**Reinforcement**  
Thanks to the usage of the strengthening, whole construction is stable and instalation is easier and quicker.



**Casing of tensioning springs**  
For better aesthetics, tension springs are equipped with special casing, which allow on higher safety of use.



**Double rollers**  
The usage of double rollers allow on better pressure of a panel to the sealing. Thanks to that, we are also able to achieve better gate guidance, whereas the drive is working on lower load.



**Sealing**  
A suitably matched gasket set is mounted on the whole circuit of the gate. Upper gasket, thermal side gaskets, sealing between the panels and matched with the panel structure, lower gasket guarantee high tightness of a product.



**Plastic caps**  
The usage of the plastic caps, secure the fittings of the gate from the corrosion.



Wider colour range available on request




Up  
**0,55**  
W/m²K

**THERMAL INSULATION**  
Factor of thermal transmittance on a level of 0,55 W/m²K

**CE**


**SAFETY**  
Confirmation of the highest safety norms is declaration of performance, CE mark.

Wide range of **colours**  
Taking care of the needs and expectations of Clients, who are looking for durable, aesthetic but also oryiginal look, we are offering a wide range of collours. There is possibility to paint in almost 200 RAL colours and several dozens of veneers, which allow on matching the gate to the rest of the building.

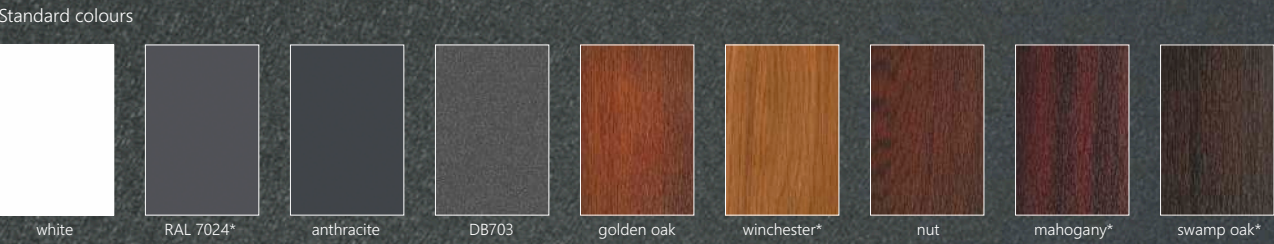

\*colours available with additional payment

**SOMMER** drive  
Universal drive for sectional gates SOMMER is available in two options A550 L and A 800 XL, with integrated LED lightning and two pilots for remote-control. There is also a possibility to install the set of battery, which will be providing continuous operating in case of lack of electricity. In standard, equipped with self-locking engine, which in case of a burglary resists in any position.

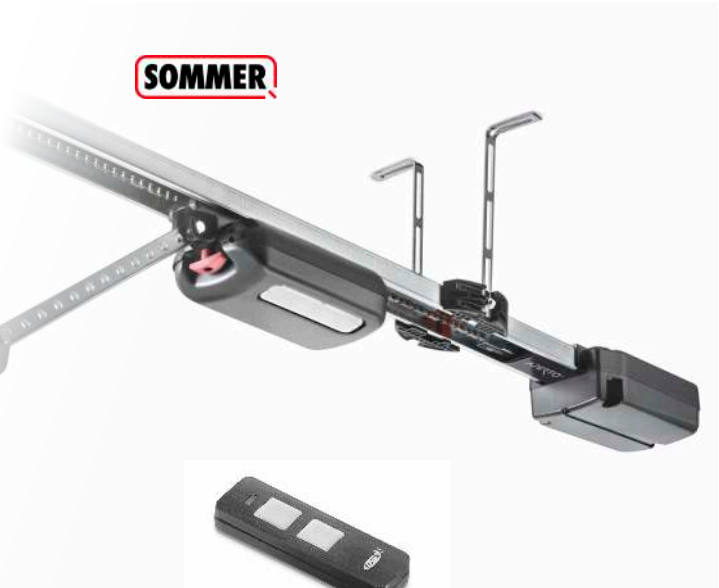

**SOMFY** drive  
SOMFY drive is available in two versions Dexxo OPTIMO 800N RTS and Dexxo PRO 1000 RTS, which is dedicated for a gates with surface of 15m². The device allow on programming the strength of obstacle detection and also slowdown the opening and closing of a gate. There is always the possibility of retrofitting the drive with additional accessories, such as emergency power battery, photocells or additional remotes.



Type	A 550 L	A 800 XL	Dexxo OPTIMO	Dexxo PRO
Maximum tractive force	550 N	800 N	800 N	1000 N
Drive power	230 V	230 V	230 V	230 V
Maximum speed	200mm/s	180mm/s	140mm/s	180mm/s
Maximum amount of devices for remote-control	20	20	32	32
Remotes in standard	2	2	1	2
Built-in lighting	LED	LED	lightbulb 21 W	lightbulb 40 W

